

# **Karst Problems and Flexible Liner Experience**

**by**

**Carl Keller**

**2010 North American Environmental Field Conference**

**January 12-15, 2010**


**Tampa, Florida**

# Topics


- **Common problems in karst formations**
- **How liners normally work**
- **Sealing of boreholes in karst**
- **Transmissivity measurement adaptations to karst**
- **Multi level sampling systems in karst**
- **Mapping of NAPLs**



# The karst situation

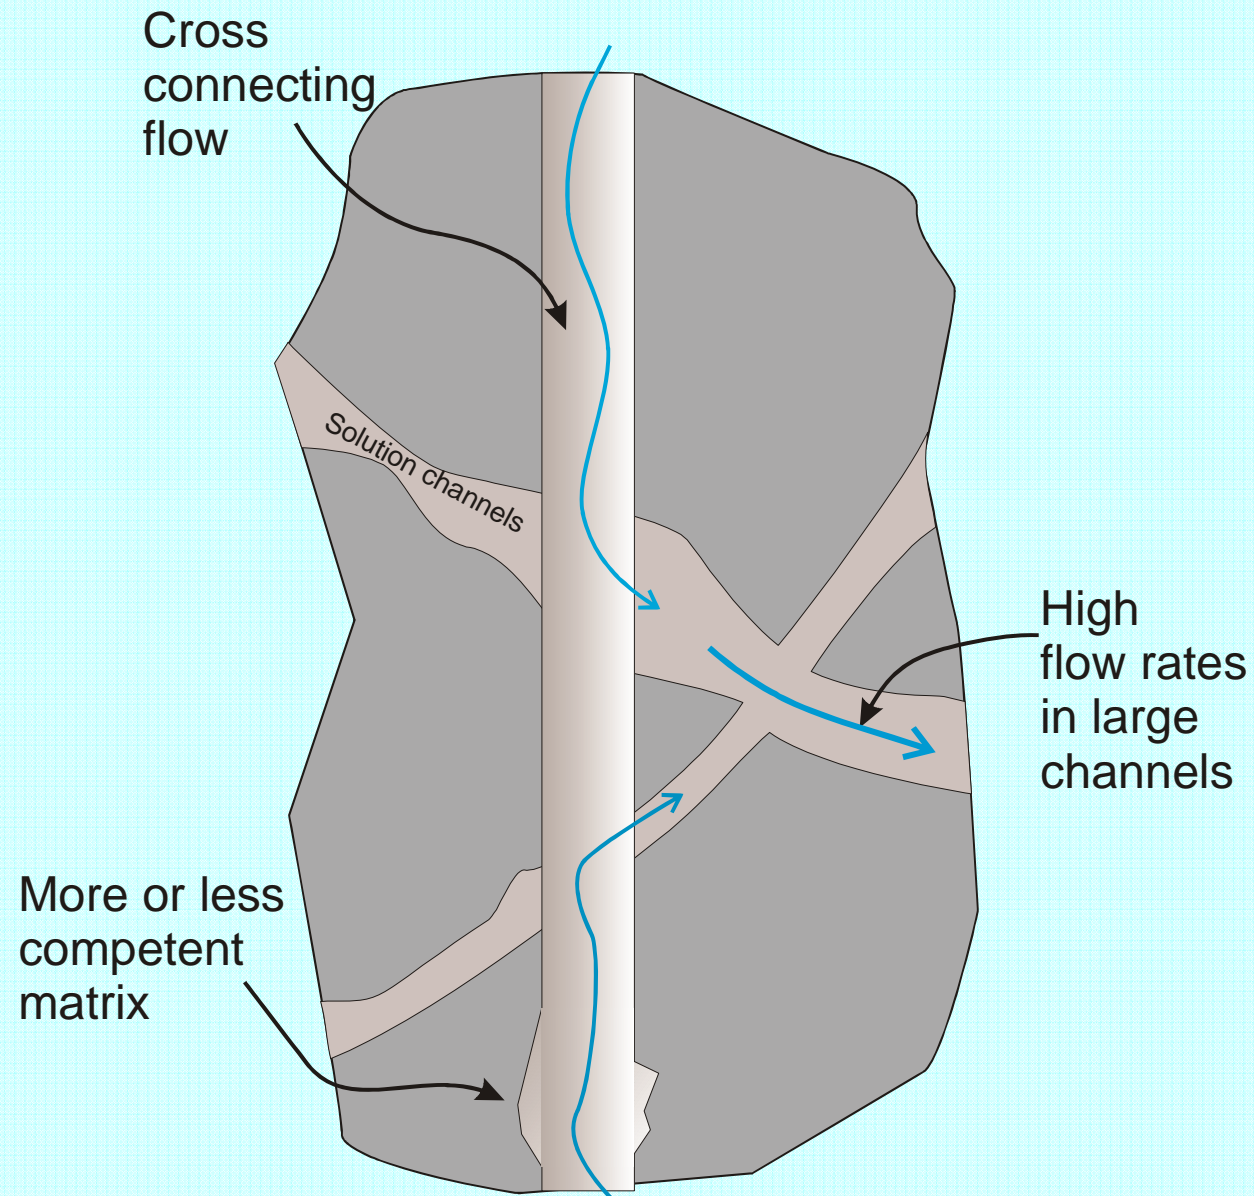


# The grout problem in karst

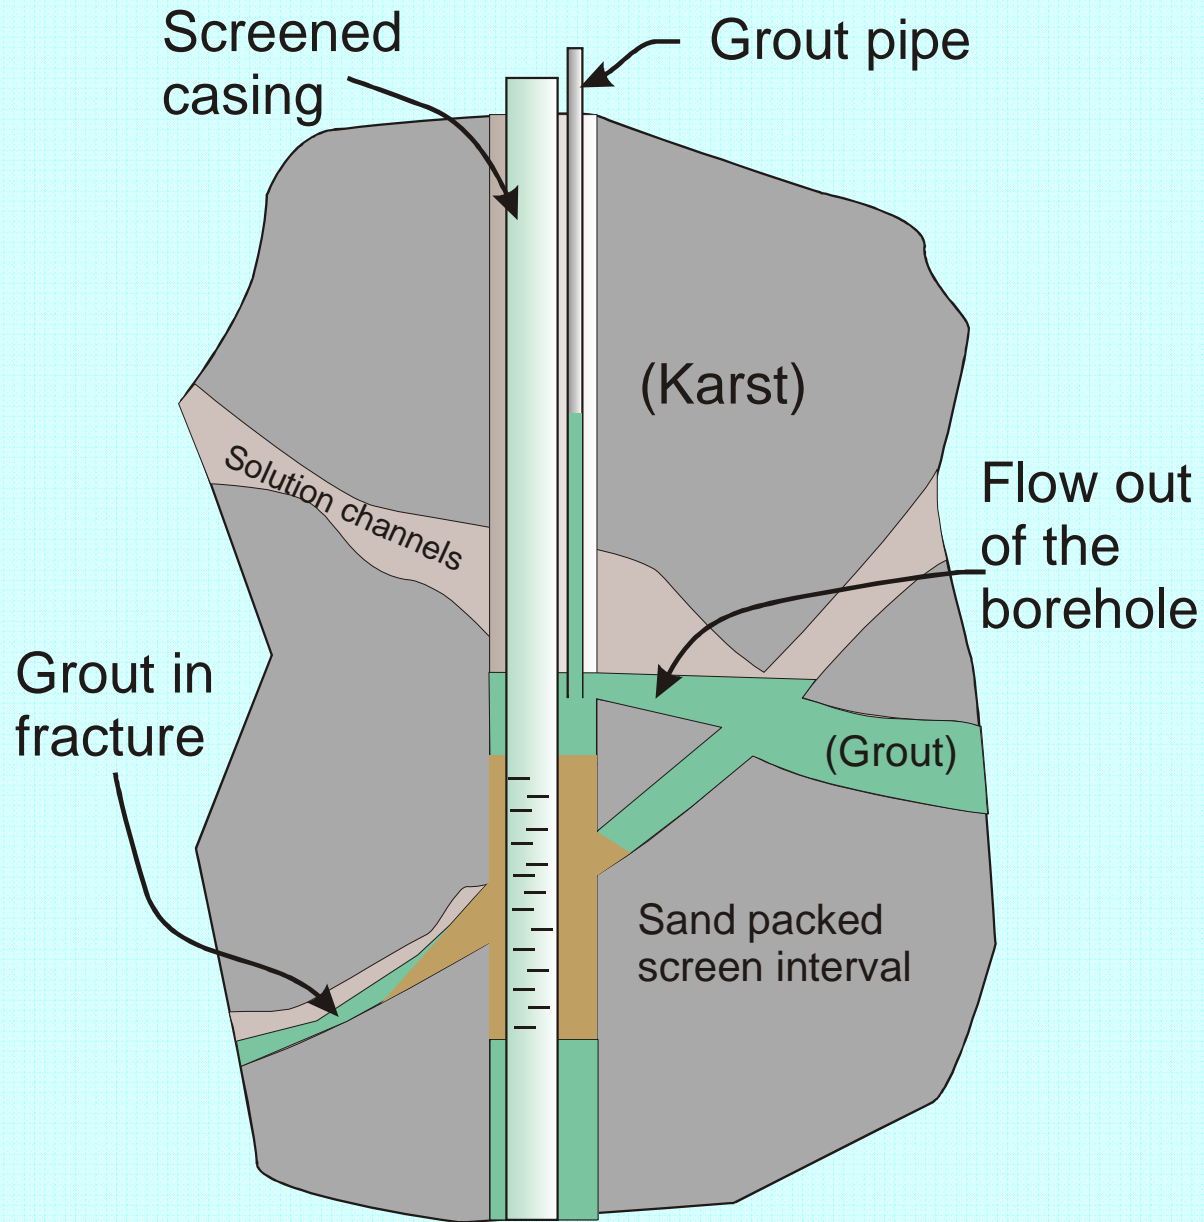



# Potential packer problem in karst

The packer seal is bypassed in the formation

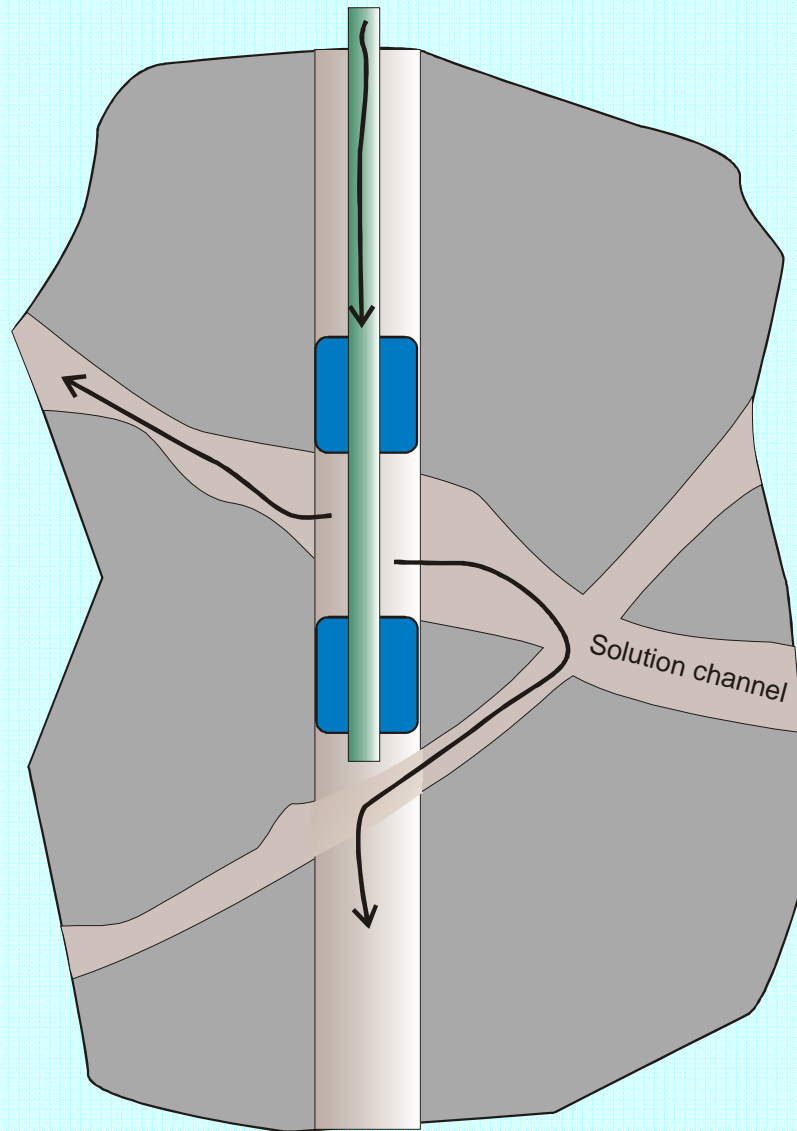


## Other common karst problems

- Large vertical flow rates in the open hole, and cross connection obscures contaminant distribution.
- High flow rates in the fractures and other transmissive features exceed the limits of many measurement devices.
- Tracer tests are frustrated by both of the above, and by the open hole storage volume.




# The blank liner quickly seals the hole

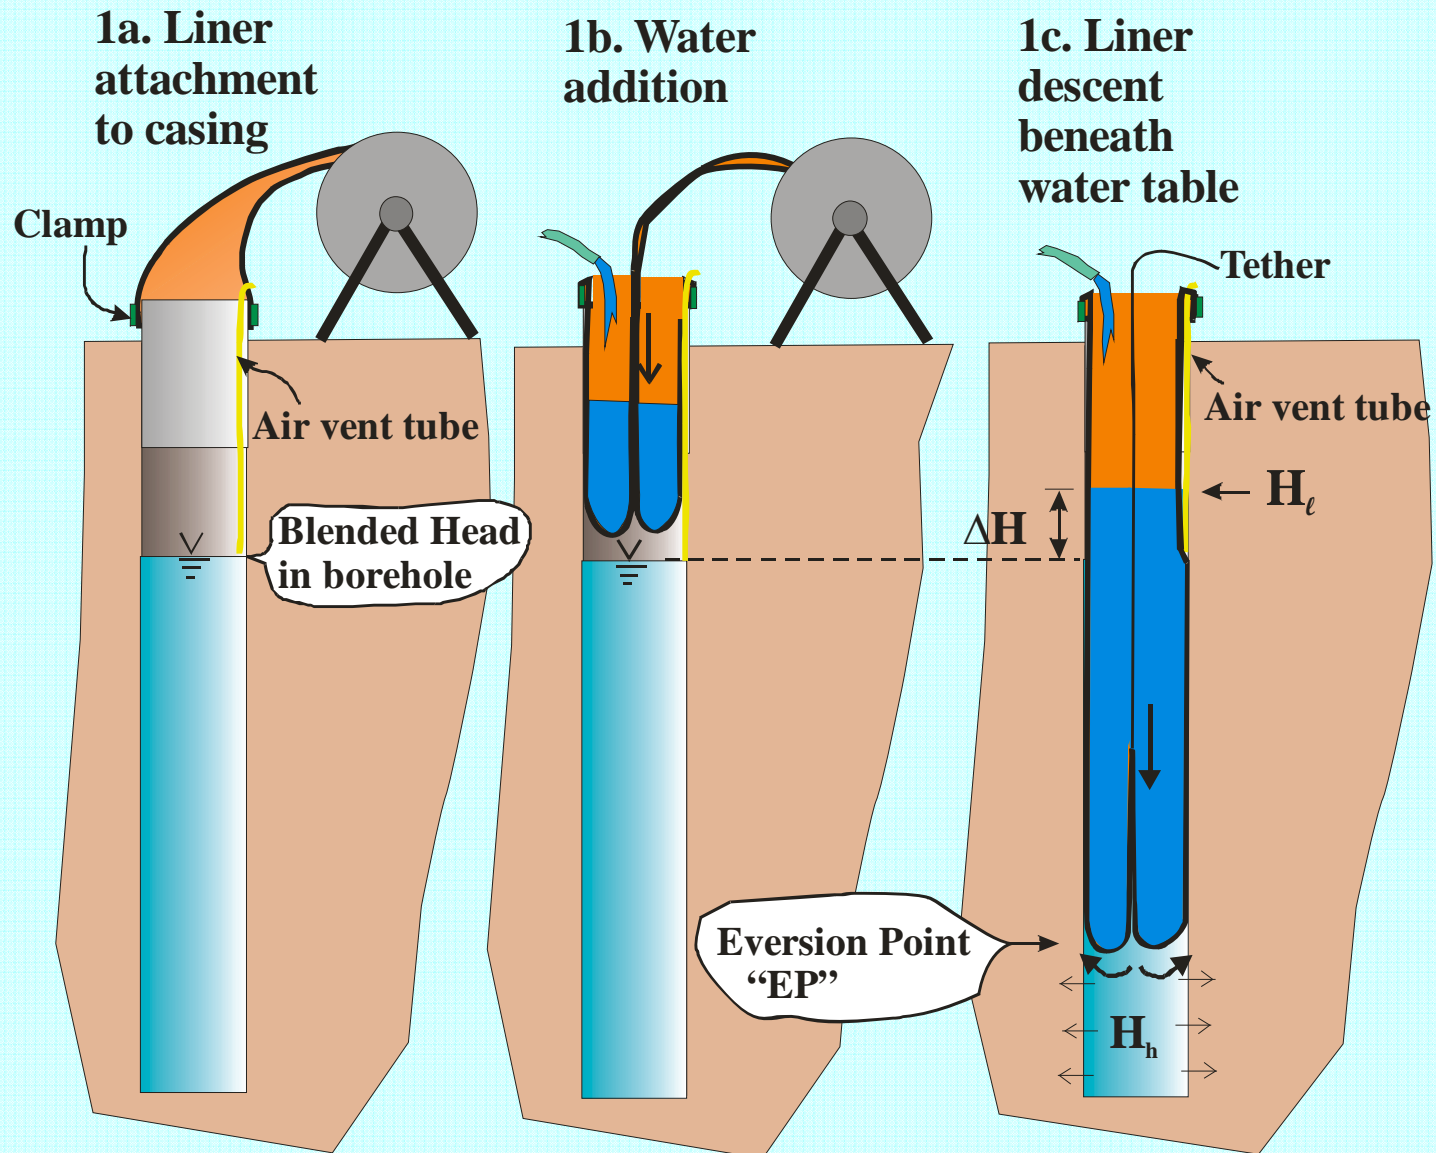

# The flexible liner everts through large openings in the borehole

No grouts or bentonite are required to seal the borehole.

The liner can not be bypassed in the formation

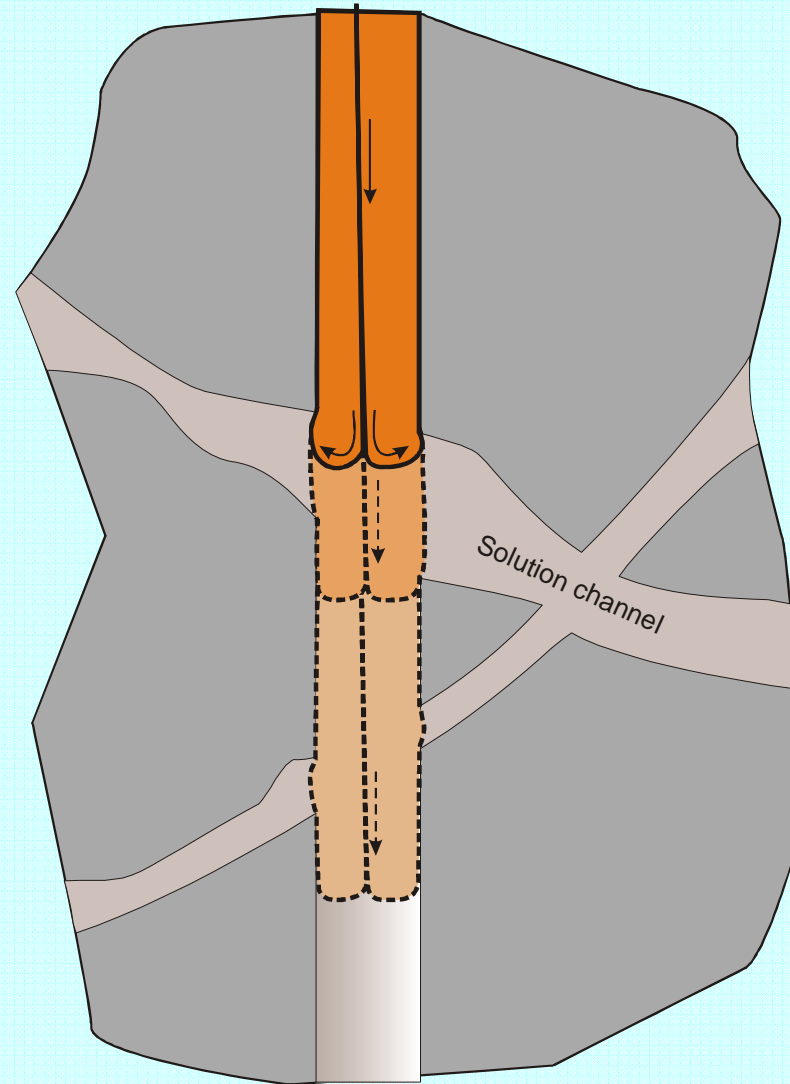



## The liner melds with the borehole structure





## **An occasional difficulty in karst is the propagation of the liner through a very large void into the hole beyond**

One solution is to drop the driving pressure in the liner to allow it to hang more nearly vertical.


In some cases, “eversion aids” have been used to aid the liner propagation through voids.

Rarely has the presence of a large void prevented the liner installation.

By the way, no liner has ever been trapped by slough of the hole wall.



# Eversion through a cavern may need an eversion aid

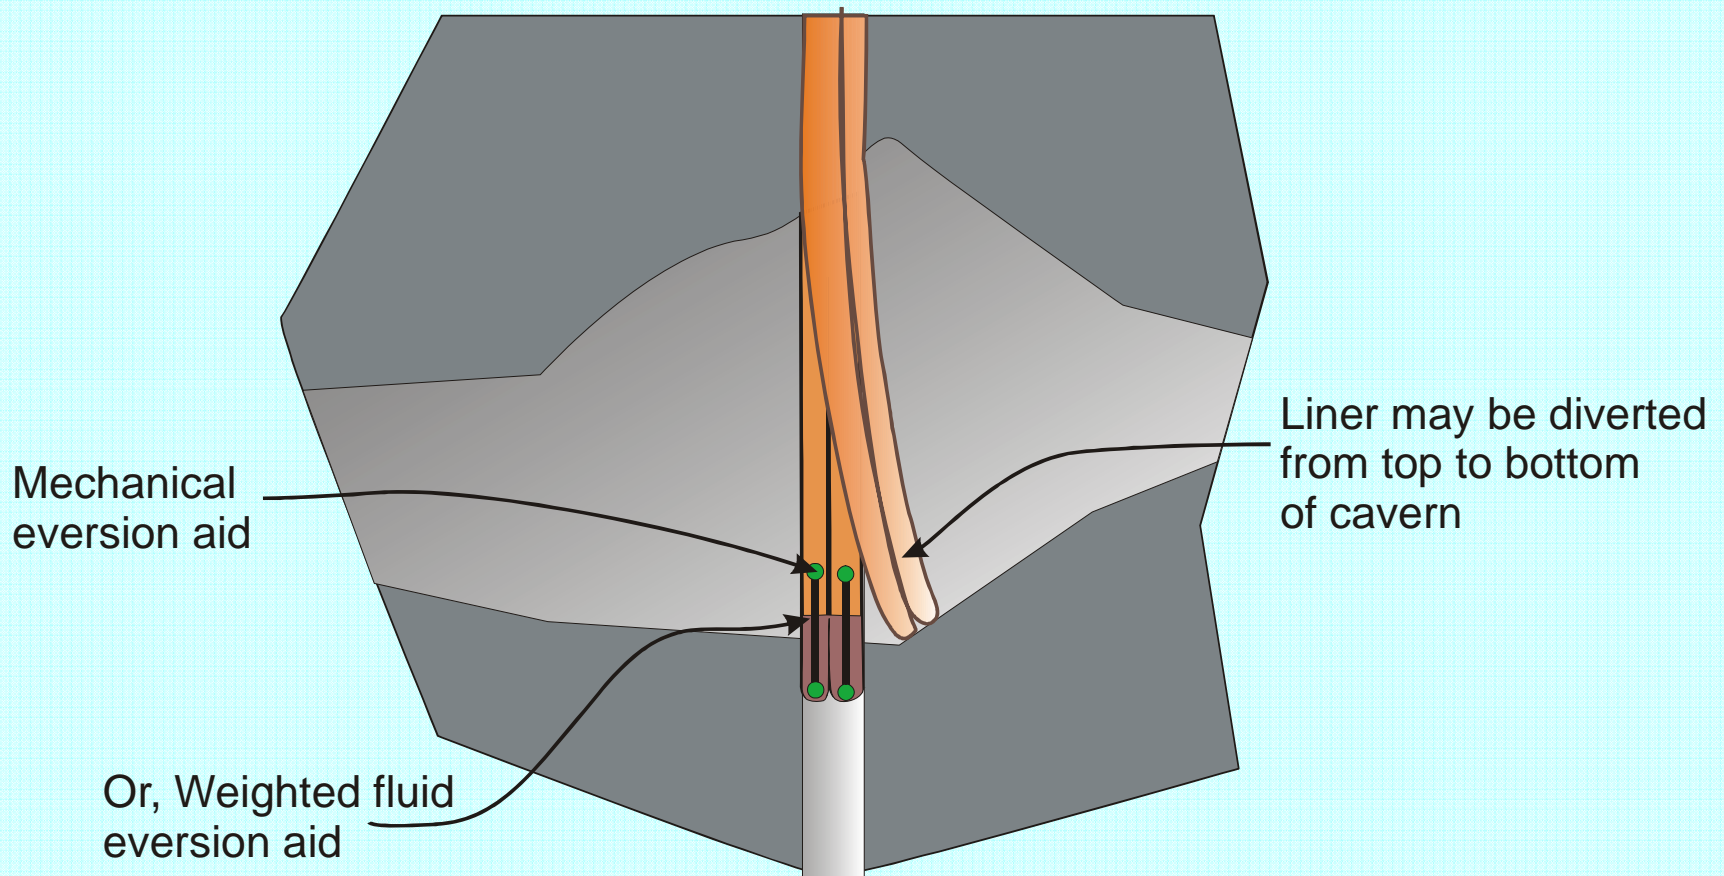


# Many logging tools can be run inside the sealing liner

1. High resolution temperature logs
2. Sonic logs
3. Radiation logs of several kinds
4. Radar
5. Induction coupled electric logs




However, the sondes must be padded and "faired" to avoid damage to the liner

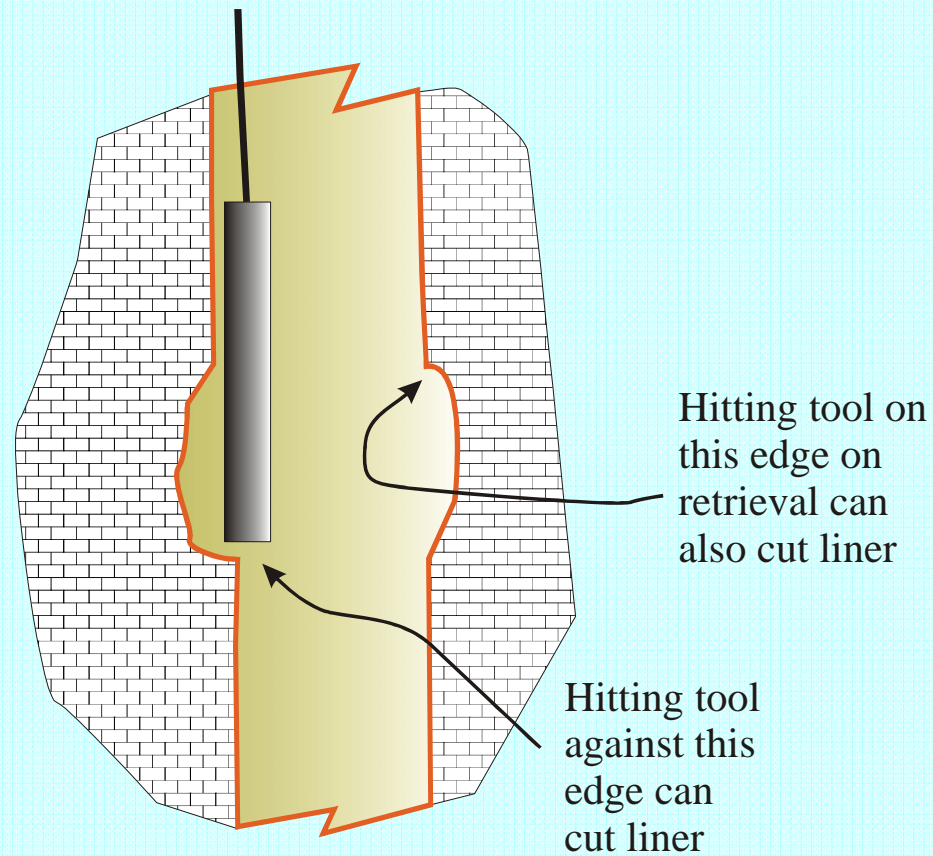


**Pad the top and bottom of tools to reduce impact on ledges and damage to liner**

# Measurement of the blank liner installation velocity gives a transmissivity profile in 1-2 hrs typically

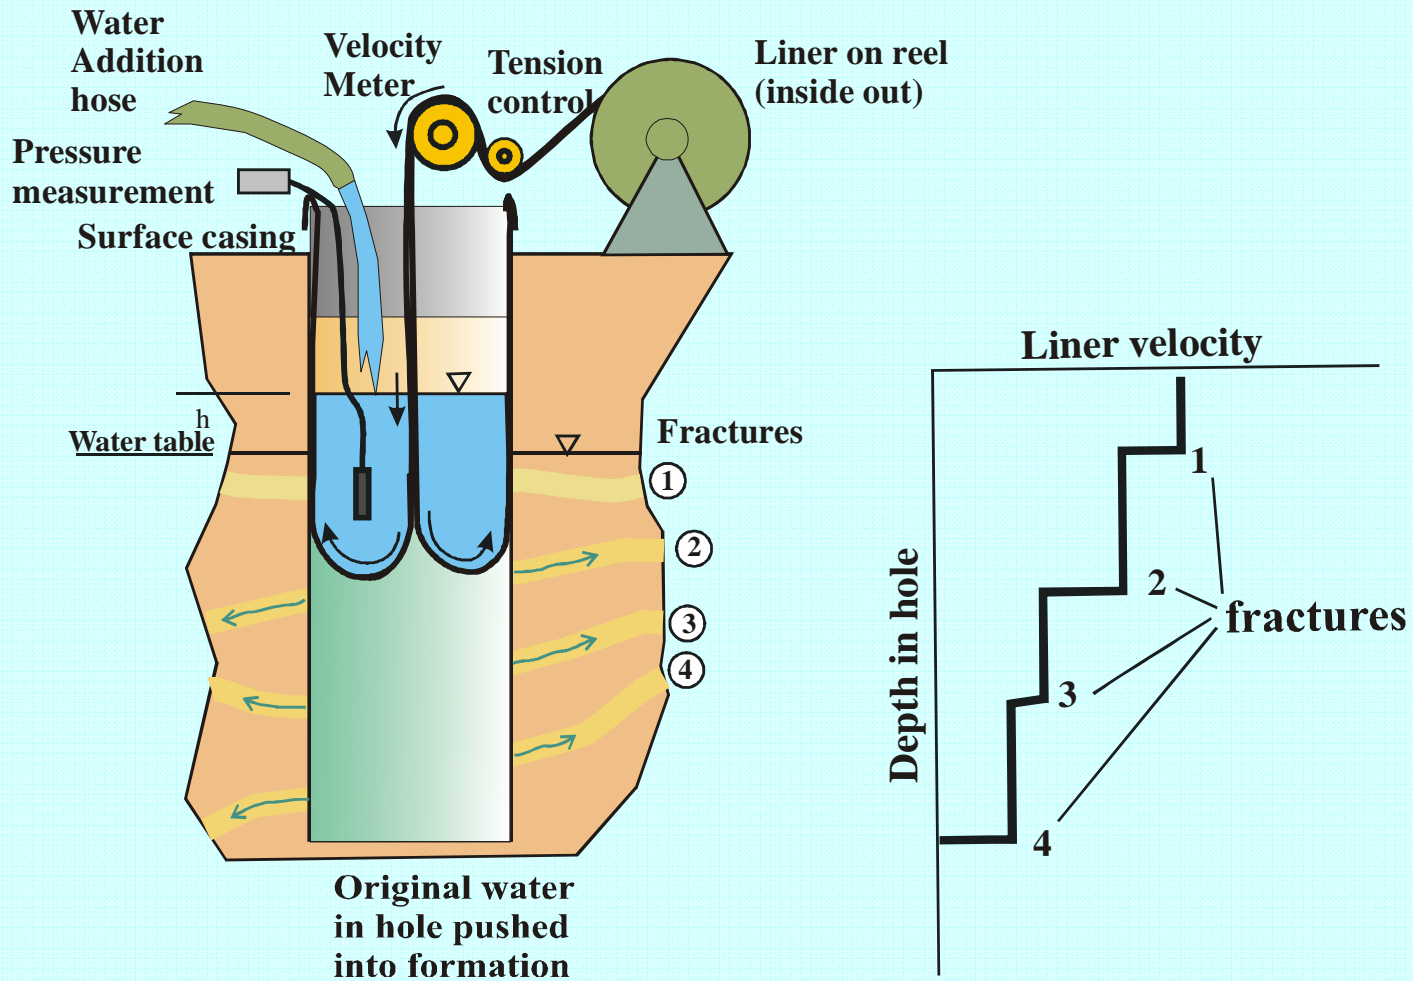



# Each time a fracture is sealed, the liner velocity drops

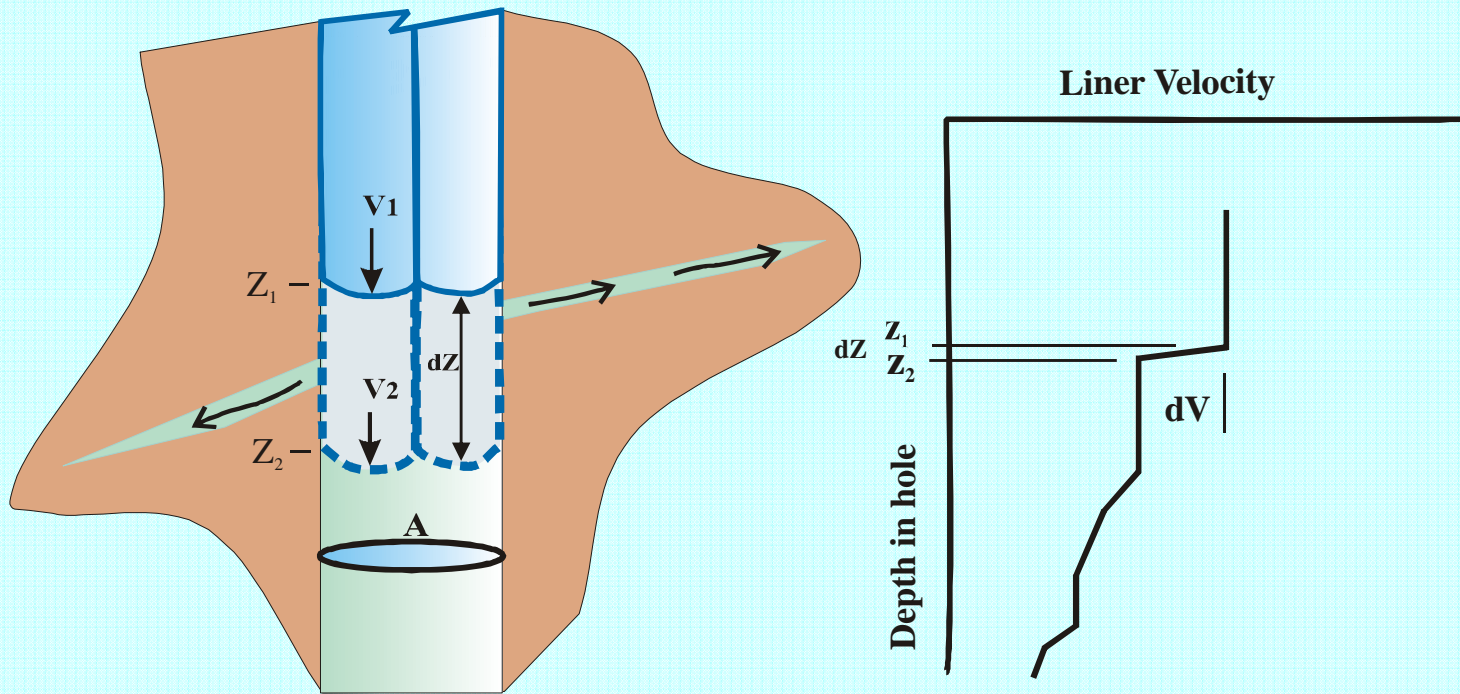


Flow rate into the fracture,  $dQ = A(V_1 - V_2)$ , where  $V_1 > V_2$

$$T = 2 \int dQ \ln(r/r_0) dH$$


# A velocity history in NJ produced this transmissivity profile

Flow rates of 50-100 gal/min are common in karst boreholes

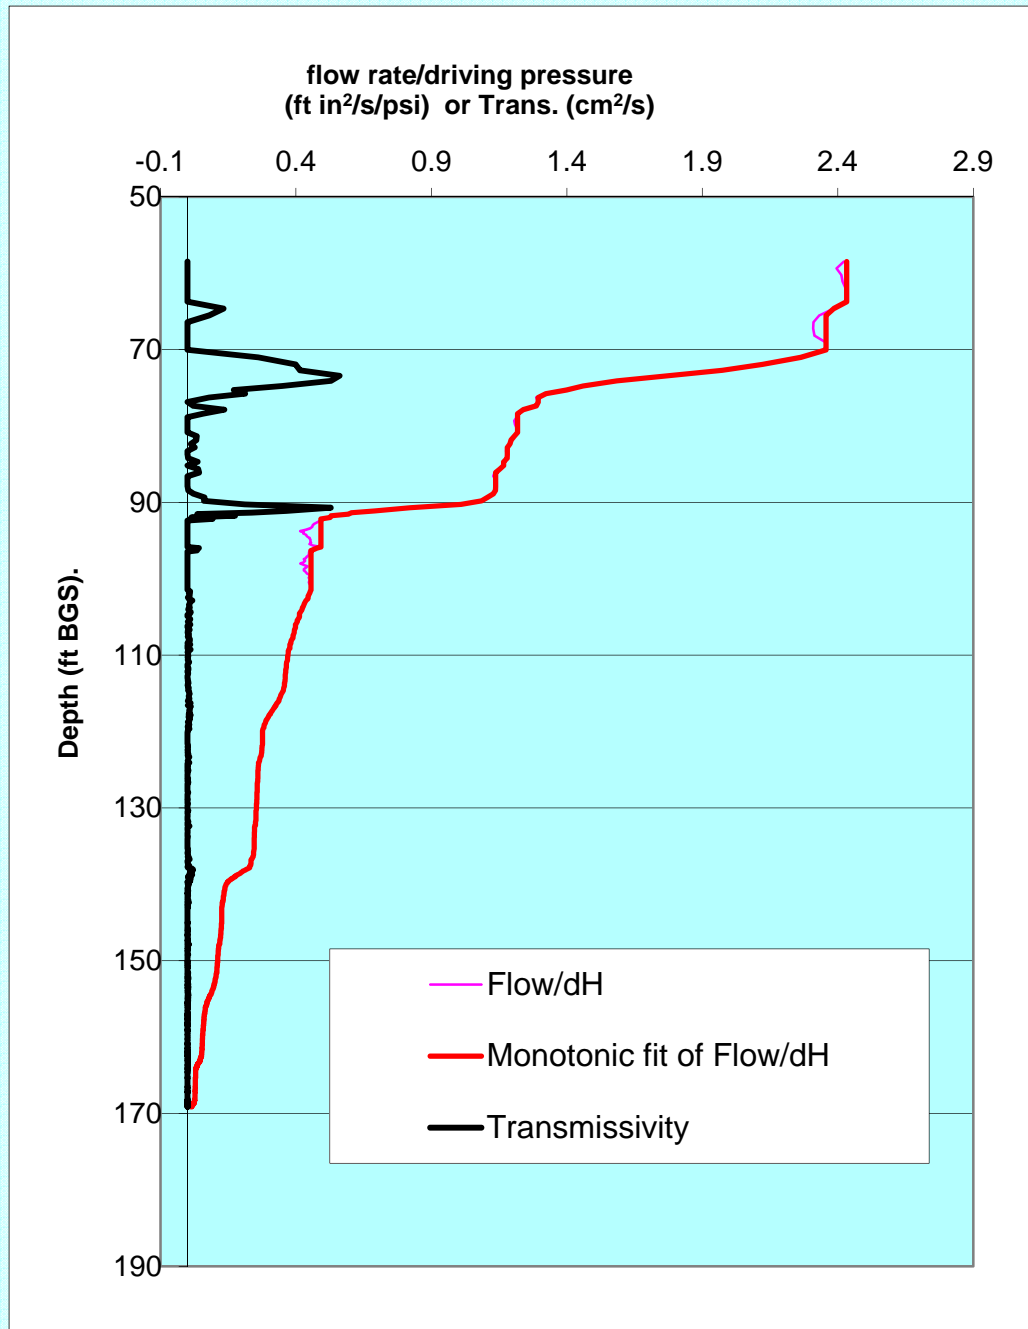



In some karst holes the vertical flow rate in the borehole exceeded 80 GPM. A pressure transducer was added to improve the data.

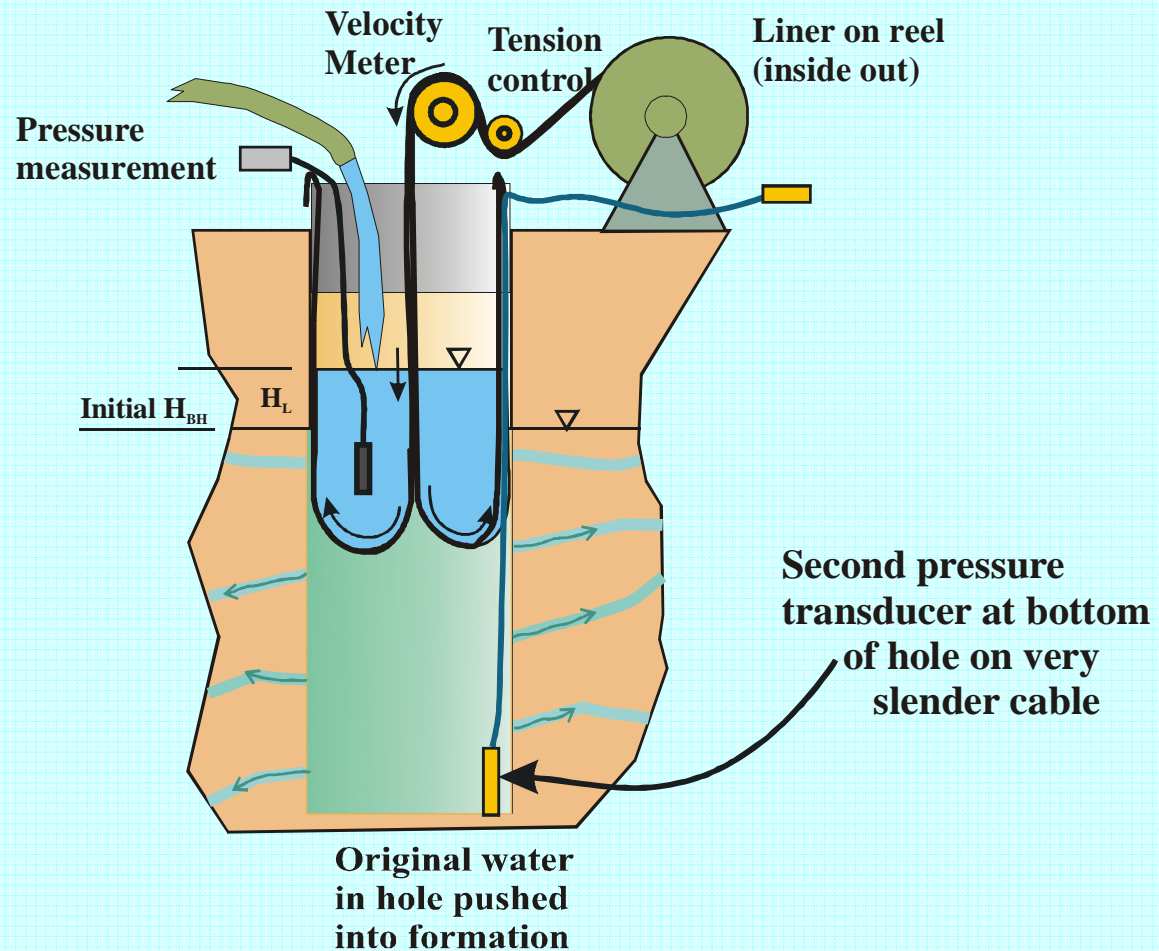

## Once the sampling intervals are defined, the blank liner is replaced with a multi level sampling system

- The MLS liner seals the entire hole
- All of the water in the borehole is inside the liner
- The samples are drawn directly from the formation
- Up to 15 ports are installed in a 6 inch diameter hole
- All ports can be purged and sampled simultaneously
- It is fully removable

Here is how it is done:




# Multi level sampling system in a liner

No grout or sand is required

The liner seal can not be bypassed to an open hole

(Single port system shown for clarity)

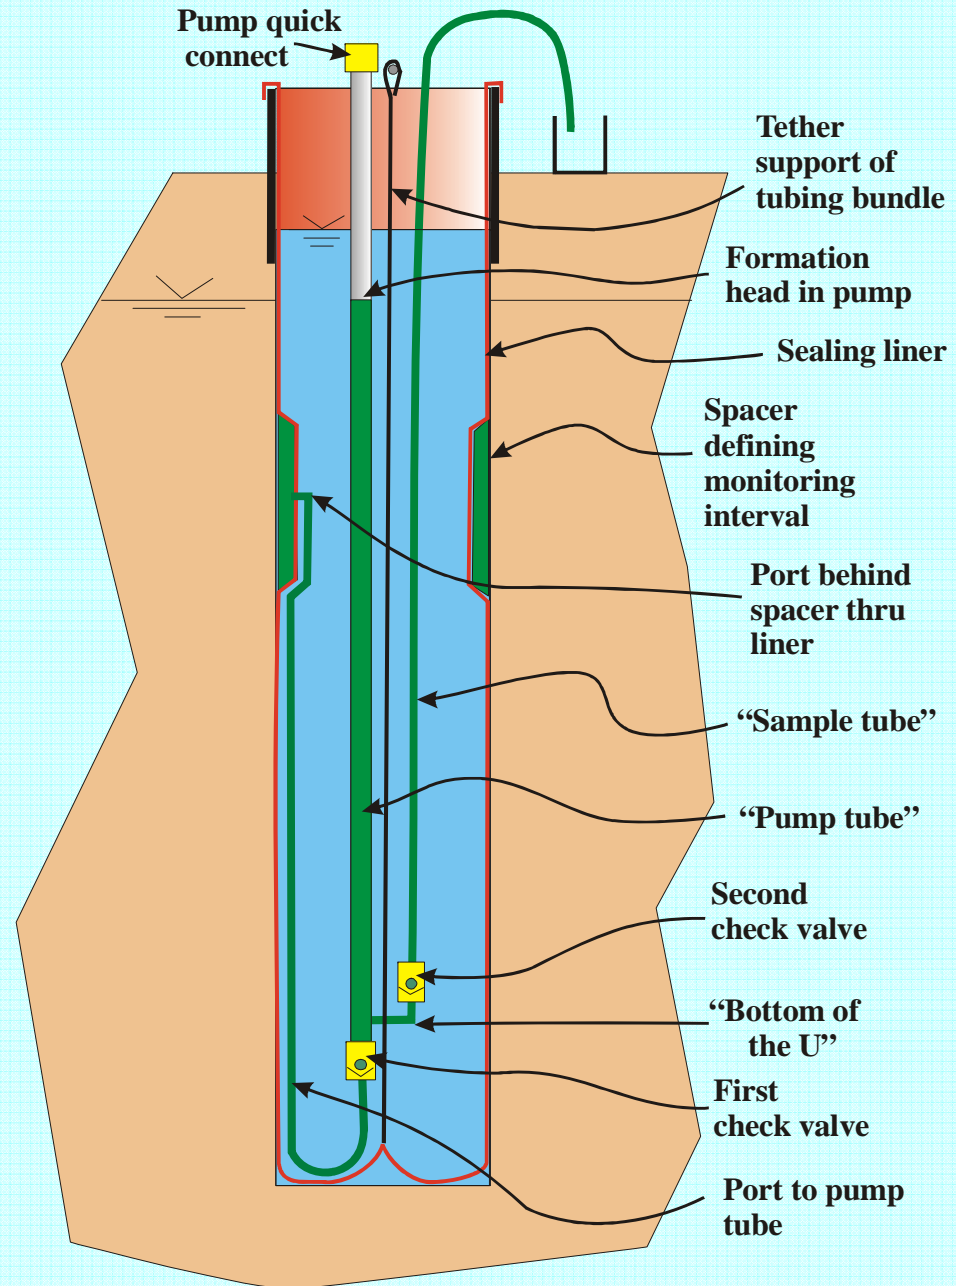


# Liner systems have been used at many karst sites

- Knoxville, TN
- Huntsville, AL
- Pittsburg, PA
- Fort Erie, Ontario, Canada
- Kokomo, IN
- Rome, GA
- San Antonio, TX
- Plus many other sites with karst like conditions.




**Some multi-level systems have been installed through driven casing in unstable formations**

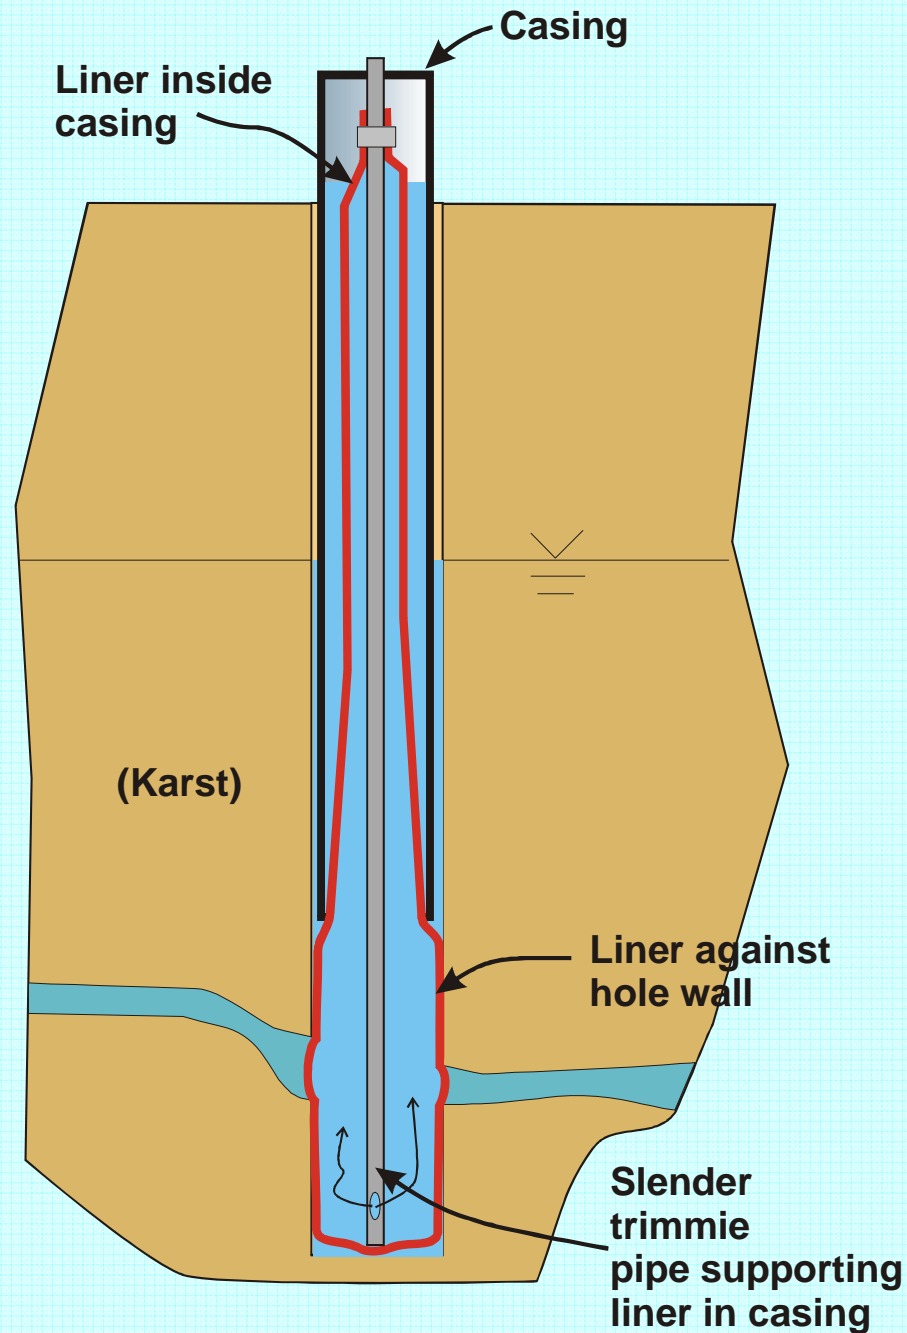



**A color reactive cover on a blank liner  
can map NAPL pure product**

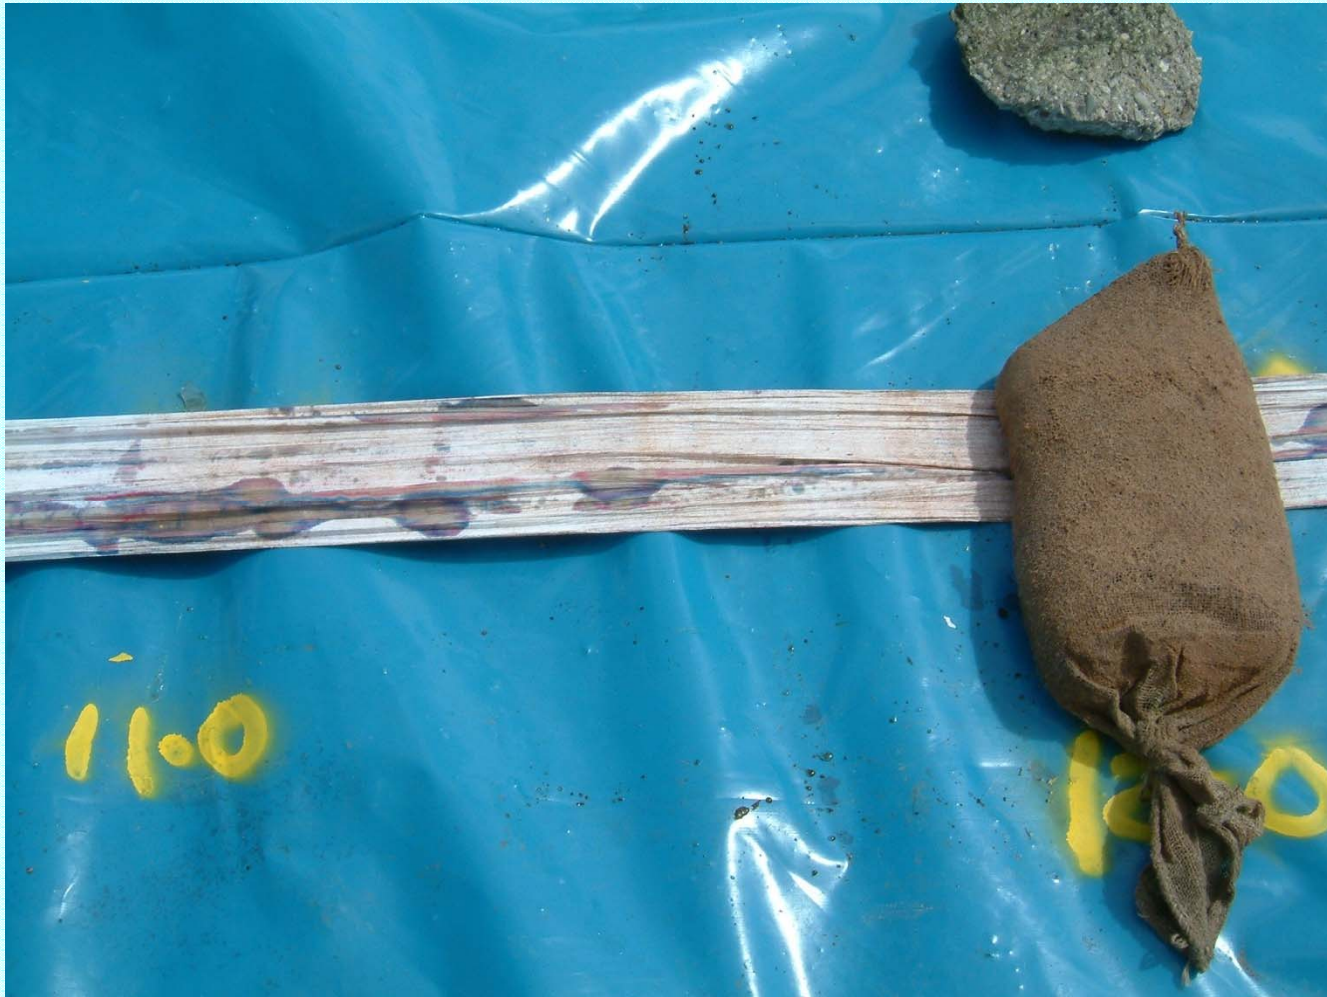



## **In summary:**

- The liner systems require no annular sealing material to be added to the borehole, and therefore none is lost to the formation.
- A liner can propagate through voids, providing a continuous seal of the hole.
- Some geophysical logs can be run inside the sealing liner.
- The transmissivity profiling method works in karst formations.

## Summary (cont)

- All the water in the borehole is inside the liner and the sampling system can be short stroked to monitor for tracers.
- The systems are fully removable and not entrapped by hole slough.
- Use of the several liner systems minimizes the total time the hole is open to cross connection.



# Thanks for your attention

More details are available on our website  
[www.flut.com](http://www.flut.com)

Note, the liner methods described are protected by several patents.